



## **RECREATIONAL VEHICLE**

### **Trojan Battery - Power Up Your RV With Confidence**

With over 80 years of experience, Trojan Battery delivers the world's most reliable and long-lasting deep cycle batteries for use in recreational vehicles (RV).

Trojan's broad portfolio of 6-volt and 12-volt flooded/wet, Deep-Cycle Gel™ and AGM batteries yield ideal performance for RV house power. Our flooded batteries feature Trojan's proprietary Maxguard® Advanced Design Separator and exclusive Alpha Plus® paste formulation. Together these technologies help extend the life of your battery, sustain performance and lower overall maintenance costs.

Our Deep-Cycle Gel™ and AGM batteries are maintenance free, require no watering and offer a convenient alternative to flooded batteries.

**Trojan's RV products deliver superior reliability and is why:**

- Seasoned RV owners know they can confidently hit the road with Trojan batteries on-board to supply all of their house power needs
- You can enjoy uninterrupted, long-lasting power and peace of mind


Trojan Battery's durability, longevity and proven technology means you can depend on our batteries for consistent performance no matter where the road may take you—from your neighborhood to across the country. We offer outstanding technical support provided by full-time applications engineers. *Trojan batteries are available worldwide through Trojan's Master Distributor Network.*

Call 800-423-6569 or 562-236-3000 for more information  
or visit us at [www.trojanbattery.com](http://www.trojanbattery.com)

BCI GROUP SIZE	TYPE	CAPACITY <sup>A</sup> Minutes		CRANKING PERFORMANCE		CAPACITY <sup>B</sup> Amp-Hours (AH)		TERMINAL TYPE (See Below)	DIMENSIONS <sup>C</sup> Inches (mm)			WEIGHT lbs. (kg)
		@25 Amps	@75 Amps	CCA <sup>D</sup> @0°F	CA <sup>E</sup> @32°F	5 Hr Rate	20 Hr Rate		L	W	H <sup>F</sup>	
<b>6 VOLT DEEP CYCLE BATTERIES</b>												
GC2	T-105	447	115	-	-	185	225	1,3,4,5,9	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	62 (28)
GC2	T-105 Plus	447	115	-	-	185	225	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	62 (28)
GC2	T-125	488	132	-	-	195	240	1,3,4,5,9	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	66 (30)
GC2	T-125 Plus	488	132	-	-	195	240	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	66 (30)
GC2H	T-145	530	145	-	-	215	260	1,3,4,5	10 3/8 (264)	7 1/8 (181)	11 5/8 (295)	72 (33)
GC2H	T-145 Plus	530	145	-	-	215	260	1,2,4	10 3/8 (264)	7 1/8 (181)	11 1/2 (292)	72 (33)
<b>12 VOLT DEEP CYCLE BATTERIES</b>												
24	24TMX	140	36	440	540	70	85	3,9	11 1/4 (286)	6 3/4 (171)	9 3/4 (248)	47 (21)
27	27TMX	175	45	530	650	85	105	3,9	12 3/4 (324)	6 3/4 (171)	9 3/4 (248)	55 (25)
24	SCS150	150	36	530	650	80	100	8	11 1/4 (286)	6 3/4 (171)	9 3/4 (248)	50 (23)
27	SCS200	200	52	620	760	95	115	8	12 3/4 (324)	6 3/4 (171)	9 3/4 (248)	60 (27)
30H	SCS225	225	57	665	820	105	130	8	13 15/16 (355)	6 3/4 (171)	9 7/8 (251)	66 (30)
<b>6 VOLT DUAL PURPOSE AGM BATTERIES</b>												
GC2	6V-AGM	385	-	1100	1400	154	200	6	10 1/4 (260)	7 1/18 (181)	10 3/4 (274)	65 (29)
<b>12 VOLT DUAL PURPOSE AGM BATTERIES</b>												
24	24-AGM	130	-	440	620	61	80	6	10 1/4 (260)	6 5/8 (168)	9/12 (241)	52 (24)
27	27-AGM	175	-	560	780	76	100	6	12 1/16 (306)	6 5/8 (168)	9 7/16 (239)	67 (30)
31	31-AGM	190	-	720	950	83	110	6	12 15/16 (329)	6 13/16 (173)	9 5/16 (237)	74 (34)
4D	4D-AGM	325	-	1110	1420	131	165	6	20 7/8 (530)	8 1/4 (209)	9 5/8 (244)	125 (57)
8D	8D-AGM	460	-	1450	1850	179	230	6	20 1/2 (521)	10 9/16 (269)	9 3/16 (233)	167 (76)
<b>6 VOLT DEEP-CYCLE GEL BATTERIES</b>												
GC2	6V-GEL	394	-	575	825	154	189	5	10 1/4 (260)	7 1/8 (181)	10 7/8 (276)	68 (31)
<b>12 VOLT DEEP-CYCLE GEL BATTERIES</b>												
24	24-GEL	147	-	330	460	66	77	5,6	10 7/8 (276)	6 3/4 (171)	9 5/16 (236)	52 (24)
27	27-GEL	179	-	395	545	76	91	5	12 3/4 (324)	6 3/4 (171)	9 1/4 (234)	63 (29)
31	31-GEL	200	-	445	620	85	102	5	12 15/16 (329)	6 3/4 (171)	9 5/8 (245)	69 (31)

- A.** The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B.** The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20 Hr and 100 Hr rates and 86°F (30°C) for the 5 Hr rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C.** Dimensions are based on maximum size. Dimensions may vary depending on type of handle or terminal.
- D.** C.C.A. (Cold Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F at a voltage above 1.2 V/cell.
- E.** C.A. (Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F at a voltage above 1.2 V/cell. This is sometimes referred to as marine cranking amps @ 32°F or M.C.A. @ 32°F.
- F.** Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

## TERMINAL CONFIGURATIONS

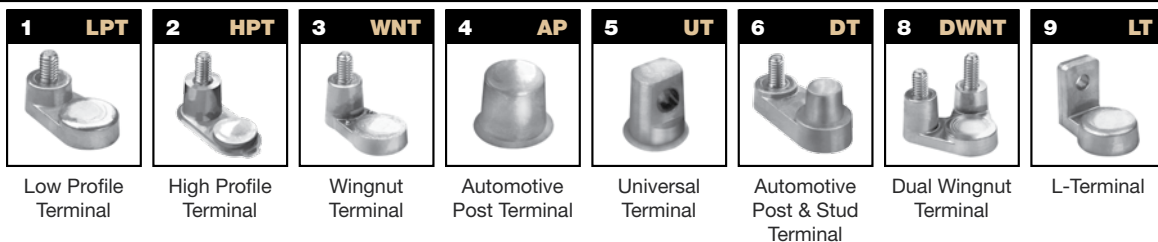

For a Trojan Master Distributor near you, call 800-423-6569 or 562-236-3000 or visit us at [www.trojanbattery.com](http://www.trojanbattery.com)